

Product Features

Deep Cycle High Power Series 400~600 Cycle Times @100%DOD

↑10%W/2hr

Discharging Power
High Rate Formula

>40Wh/kg

Energy Density
Special Paste Formula

↑40%

Power Output Area
High Density Grouping

↓50%

Grid Corrosion
Rare-earth patent alloy



Product Applications



Low-speed EV



Electric Forklift



Wheelchair



Lift Truck



Motor Home



Sweeper



Kid's Electric Bike



Electric Motorcycle



E-scooter



Electric Tricycle



Water Scooter



Snowmobile

Physical Specifications

Model	Dimensions (mm/inch)				Weight (kg/lbs)	Terminal	Container
	Length	Width	Height	Total Height			
6-DZM-25	181/7.13	77/3.03	170/6.69	170/6.69	6.50/14.3	IIO	ABS UL94-HB (Optional: FR ABS UL94-V0)

Product Specifications

Nominal Voltage	Rated Capacity ^{25°C/77°C}	Operating Temp.Range	Capacity Effected Temp	Capacity vs Storage Time
12V	25.0Ah 20hr Rate (1.80V/cell)	Discharge:-15°C~50°C (5°F~122°F) Charge:0°C~40°C (32°F~104°F) Storage:-15°C~40°C (5°F~104°F) Optimum:25°C±2°C (77°F±5°F)	40°C (104°F):106%	Three months : 90% Six months : 80% Nine months : 60%
	23.8Ah 10hr Rate (1.80V/cell)		25°C (77°F):100%	
	23.2Ah 5hr Rate (1.75V/cell)		0°C (32°F):85%	
	21.6Ah 2hr Rate (1.75V/cell)		-15°C (5°F):72%	


Constant Current Discharge (A)@25°C (77°F)

F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	29.6	24.2	17.7	10.5	7.32	5.66	4.58	3.84	2.91	2.35	1.23
1.80V/cell	30.3	24.7	18.0	10.7	7.42	5.72	4.62	3.88	2.94	2.38	1.26
1.75V/cell	31.0	25.2	18.3	10.8	7.50	5.76	4.65	3.90	2.96	2.40	1.26
1.70V/cell	31.5	25.5	18.5	10.9	7.56	5.79	4.68	3.92	2.97	2.41	1.27
1.67V/cell	32.1	25.9	18.7	11.1	7.60	5.81	4.69	3.93	2.98	2.41	1.27
1.60V/cell	32.9	26.3	18.9	11.2	7.64	5.84	4.70	3.94	2.99	2.41	1.27

Constant Power Discharge (W/cell)@25°C (77°F)


F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	58.3	48.0	35.2	21.0	14.7	11.3	9.17	7.69	5.82	4.70	2.46
1.80V/cell	59.7	48.9	35.8	21.3	14.8	11.4	9.25	7.76	5.89	4.77	2.51
1.75V/cell	60.9	49.8	36.3	21.6	15.0	11.5	9.30	7.81	5.91	4.79	2.52
1.70V/cell	61.9	50.5	36.8	21.9	15.1	11.6	9.34	7.83	5.94	4.80	2.53
1.67V/cell	63.0	51.2	37.2	22.1	15.1	11.6	9.35	7.85	5.95	4.81	2.53
1.60V/cell	64.5	51.9	37.5	22.3	15.2	11.6	9.37	7.86	5.96	4.81	2.53

Battery Dimensions (mm)

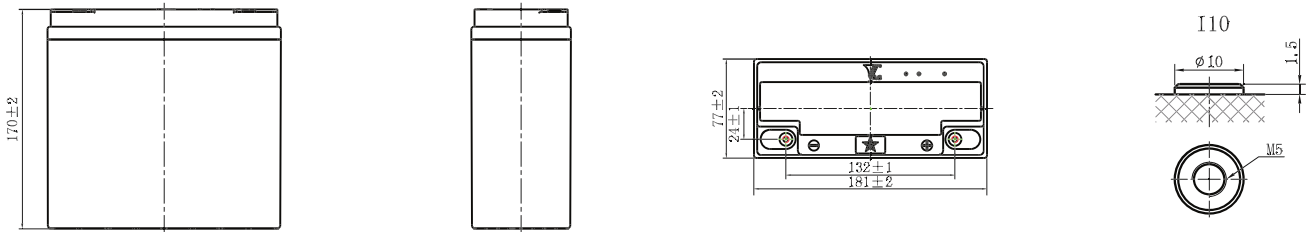


Electrical Characteristics


Discharging Characteristics@25°C(77°F)

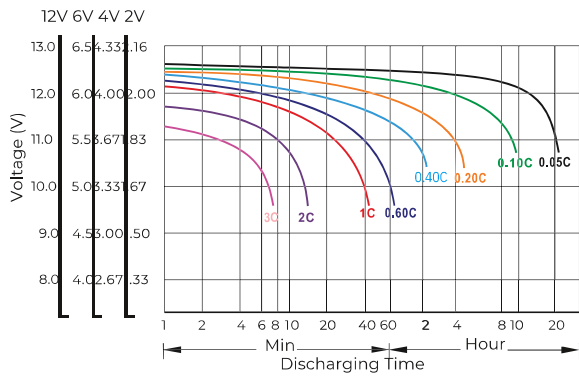


Charging Characteristics@25°C(77°F)

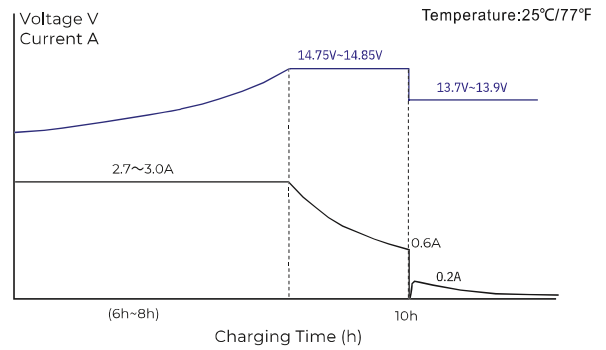


Capacity vs Temperature

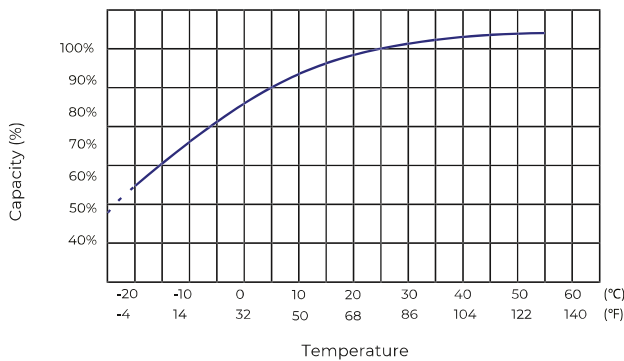


Self-discharge vs Time

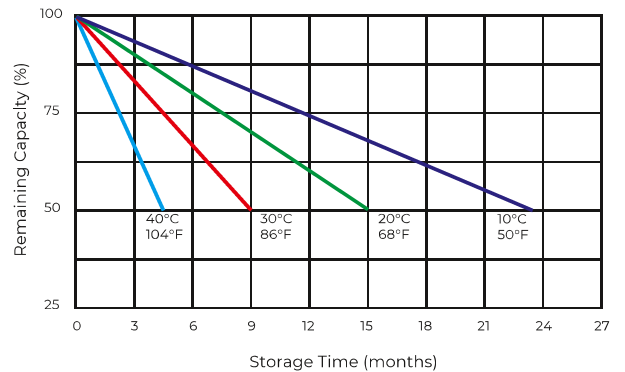

Cycle Life vs Depth of Discharge@25°C(77°F)

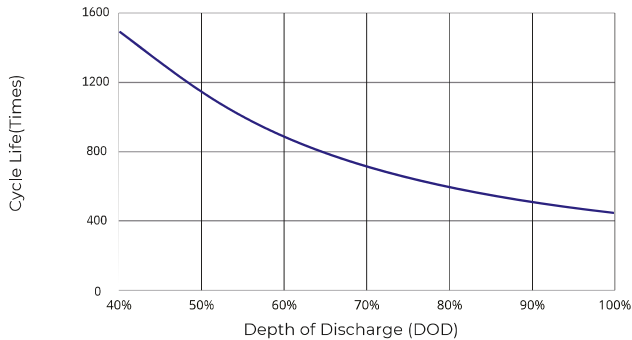

Cycle Life vs Remaining Capacity@25°C(77°F)

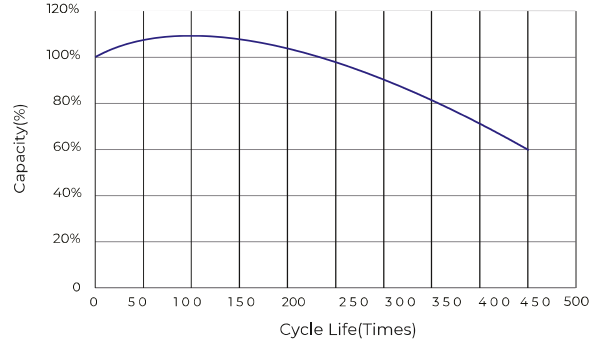

Usage and Maintenance

Limited Current	Limited Voltage	Floating Voltage
Limited current: ≤0.12CA	14.75V~14.85V@25 °C (77 °F) Temp.Coefficient:~24mV/°C	13.7V~13.9V@25 °C (77 °F) Temp.Coefficient:~18mV/°C